

GULFOTECH Plastic Equipment Pads

General Properties »

- Material: Plastic HDPE
- Finish: Gray
- Recommended temperature range: -48°F to 180°F
- Ignition temperature: 725 °F
- Flash ignition temperature: 698°F
- Tested per ASTM D2299. Does not crack, flake, or warp when subjected to...
 - R-22 or R- 134a Refrigerant
 - Compressor oil
 - Salt solution (20% by volume)
 - Synthetic canine urine

Description »


GULFOTECH PLASTIC EQUIPMENT PADS designed to support HVAC outdoor units and other outdoor equipment. These pads are a great environmentally friendly alternative to concrete equipment pads, thanks to the recycled content and low raw material usage when formed. The rugged design and optimized rib-pattern provide for excellent support on soil and gravel terrain. Available in both 2" and 3" thickness, depending on local building code requirements.

Application »

- HVAC outdoor units.
- Installation: pad should be placed on compacted level soil, gravel, or harder surfaces, including but not limited to concrete or asphalt.

Features »

- Lightweight, durable, and exceptionally strong.
- Textured top surface to reduce slippage.
- Concrete gray color.
- Unaffected by UV exposure or extreme weather.

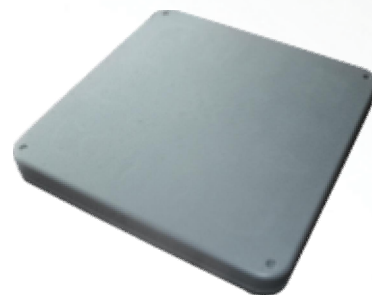

2" Thick Pads

| Part No. | Specifications | EST. ALLOW. LOAD | Pads/skid |
|----------|----------------|------------------|-----------|
| GT2424-2 | 24" x 24" x 2" | 900 LBS | 25 |
| GT3030-2 | 30" x 30" x 2" | 1050 LBS | 25 |
| GT3232-2 | 32" x 32" x 2" | 1120 LBS | 25 |
| GT3636-2 | 36"x 36"x 2" | 1280 LBS | 25 |

3" Thick Pads

| Item No. | Specifications | EST. ALLOW. LOAD | Pads/skid |
|----------|----------------|------------------|-----------|
| GT1838-3 | 18" x 38" x 3" | 1120 LBS | 20 |

To utilize maximum load rating, the weight should be evenly distributed across the pad surface.